


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G06F 13/00		A2	(11) International Publication Number: WO 99/35584 (43) International Publication Date: 15 July 1999 (15.07.99)
<p>(21) International Application Number: PCT/US99/00105</p> <p>(22) International Filing Date: 5 January 1999 (05.01.99)</p> <p>(30) Priority Data: 09/002,600 5 January 1998 (05.01.98) US</p> <p>(71) Applicant: AMIGA DEVELOPMENT LLC [US/US]; 600 North Derby Lane, North Sioux City, SD 57049 (US).</p> <p>(72) Inventor: WUGOPSKI, Theodore, D.; 4828 Overton Hollow, Fort Worth, TX 76109 (US).</p> <p>(74) Agent: VIKSNINS, Ann, S.; Schwegman, Lundberg, Woessner & Kluth, P.O. Box 2938, Minneapolis, MN 55402 (US).</p>		<p>(81) Designated States: AU, CA, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>Without international search report and to be republished upon receipt of that report.</i></p>	
<p>(54) Title: REMINDER SYSTEM FOR SCHEDULED RECORDINGS</p> <p>(57) Abstract</p> <p>Many home entertainment systems include a video cassette recorder or other recording device that has an automatic recording feature, which automatically starts a scheduled recording without user intervention, may start recording without enough recording tape to complete the scheduled recording or may inadvertently over-record a one-of-a-kind recording of a birth, marriage, or graduation. Accordingly, one embodiment of the present invention includes a receiver for receiving a channel signal which carries a plurality of programs; a recording device for recording one of the programs; and an output device for outputting a reminder signal before the recording device begins recording the one program. In preferred embodiments, the output device includes a reminder database for storing a remind time that determines when the reminder signal is output, and the reminder signal provides a message concerning recording media. Thus, the present invention prevents the loss of data recording opportunities, but also guards against over-recording one-of-a-kind recordings.</p>			
<p>REF. <u>4</u> DOCKET <u>Pu 040072</u></p> <p>CORRES. COUNTRY: _____</p> <p>COUNTRY: <u>PCT + US</u></p>			

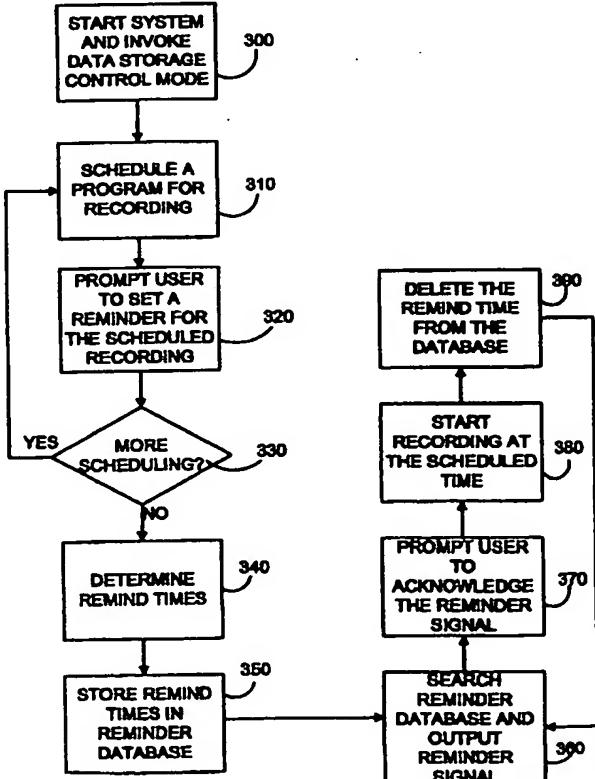

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

REMINDER SYSTEM FOR SCHEDULED RECORDINGS

Field of the Invention

The present invention pertains to home entertainment systems.
5 particularly home entertainment systems that feature scheduled recording of video programs or programming events.

Background of the Invention

The home electronics industry, in the midst of an on-going convergence of televisions and computers, has produced a new class of products, known as
10 PC-TV systems, or personal-computer-television systems. In their simplest form, these systems allow a user to selectively switch between using a video monitor to watch television or to support computer activities, like word processing, creating spread sheets, playing computer games, or even surfing the world wide web. A seminal example, the Gateway Destination PC-TV system
15 from Gateway 2000, Inc., not only weds a television to a personal computer, but allows system expansion to include satellite receivers and video-cassette recorders (VCRs).

Destination and other such systems additionally include an automatic recording feature which allow users to instruct VCRs to automatically record
20 specific upcoming television programs, days, weeks, or even months before they actually occur. The instructions typically designate a channel, a start time, and an end time, and the systems log, or register, the instructions, for future execution. Once registered, the systems automatically select the designated channels and begin and end recordings at the designated times.

25 Although this feature provides a wonderful convenience for users, it also creates a high likelihood that users will forget previously-logged recording instructions, which in turn can cause several problems for users. For example, a user may load a video cassette without enough "room" to record an entire program or even forget to load any cassette at all. Thus, the system will be
30 unable to execute a registered recording instruction, resulting in partial or complete loss of a recording opportunity. Additionally, users often forget to remove rewound video cassettes from their VCRs and inadvertently allow their

systems to automatically record over priceless, one-of-a-kind recordings of births, marriages, graduations, etc.

Summary of the Invention

To address these and other shortcomings, the present invention provides

5 a method and system of reminding users about scheduled recordings.

Specifically, one embodiment of the method entails scheduling a data recording for a specific time, and then outputting a reminder signal before the specific time of the data recording. In other embodiments, the method outputs a reminder signal concerning recording media and allows a user to cancel the data recording

10 after the reminder signal is output.

One embodiment of the system includes a receiver for receiving a channel signal which carries a sequence of programs, a recording device for recording one of the programs, and an output device for outputting a reminder signal. In preferred system embodiments, the recording device includes a video-cassette recorder, and the output device includes a computer and a display.

15 The reminder method and system of the present invention is particularly useful in reminding users to load recording devices, such as video cassette recorders, with sufficient tape to record an entire program, thereby preventing the sometimes costly-loss of a recording opportunity. Additionally, the reminder 20 method and system safeguards against over-recording of one-of-a-kind recordings of births, marriages, graduations, etc., which users may inadvertently leave in a recording device.

Other embodiments, aspects and advantages of the invention will become apparent after considering the accompanying drawings and the following

25 detailed description.

Brief Description of the Drawings

The present invention is described with reference to three accompanying drawings. In the drawings, or figures, like reference numbers indicate identical or functionally-similar elements. Additionally, the left-most digit of each 5 reference number identifies the figure where each reference number first appears.

Figure 1 is a diagram of a PC-TV system incorporating the invention;

Figure 2 is a table illustrating a data structure for a reminder database feature of the PC-TV system; and

Figure 3 is a flowchart of a method incorporating the invention.

10 Description of the Preferred Embodiments

The following detailed description, which references and incorporates Figures 1-3, describes and illustrates specific preferred embodiments of the invention. These embodiments, offered not to limit but only to exemplify and teach the invention, are shown and described in sufficient detail 15 to enable those skilled in the art to practice the invention. Thus, where appropriate to avoid obscuring the invention, the description may omit certain information known to those of skill in the art.

Figure 1 shows a new PC-TV (or convergence) system 100, which includes a reminder database and related reminder-generation software.

20 Specifically, PC-TV system 100, which preferably incorporates all features of the Destination PC-TV system from Gateway 2000, Inc. of North Sioux City, South Dakota, includes a monitor 110, a tuner-receiver 120, a personal computer 130, and a recording device 140.

Monitor 110, the heart of the system from a user perspective, displays 25 video programming from tuner-receiver 120 or personal computer 130. Monitor 110 also includes built-in audio speakers (not shown) for outputting audible signals. In the preferred embodiment, the monitor provides a super-VGA display format.

Tuner-receiver 120 receives audio or video or digital data signals via 30 direct connection or wireless coupling to a multi-channel programming source. The signals for a given channel carry a scheduled sequence of programs, or programming events. The preferred embodiment, tuner-receiver 120 accepts

cable television signals, local over-the-air broadcast signals, and direct satellite television signals.

Computer 130, operatively coupled to monitor 110 and tuner-receiver 120, includes a processor 131, a local memory 132, mass-data-storage devices 133 and 134, a modem 135, a clock 136, and a set of user interface devices 137. Interface devices 137 include a keyboard 137A, a mouse or other pointing device 137B, and a microphone 137C, all of which support user interaction with a graphical user interface, preferably a version of Microsoft Windows.

Mass data-storage device 133, preferably a computer-controllable video cassette recorder (VCR) or other recording device, records audio, video, or digital data on a replaceable read-write, data-storage medium, such as a magnetic recording tape. However, the invention encompasses any device capable of recording and storing audio, video, or digital data.

Mass-data-storage device 134, which preferably includes a hard drive, stores a reminder database 134A which stores timing data governing the output of reminder signals. Figure 2 shows details of the preferred embodiment of the database, which comprises a number of reminder records. Each record includes a remind-time field which governs when a particular reminder occurs. In other embodiments, the record also includes a duration field which specifies the length of time of the scheduled recording, and a message field which lists a particular reminder message to be output.

Storage device 134 also includes reminder-generation software 134B which cooperates with reminder database 134A. Software 134B operates within a broader software architecture which controls numerous other functions and services of PC-TV system 100. For example, the software may operate within the software architecture disclosed in co-pending, co-assigned and co-filed patent application "Architecture for Convergence Systems," which has the same assignee and filing date as the present application.

When executed, reminder-generation software 134B causes system 100 to operate according to the preferred method illustrated in Figure 3. The method begins at step 300 with a system user starting system 100 and invoking a data-storage control mode for data-storage device 133.

Step 310 entails scheduling a recording session to begin and end at specific times. In the preferred embodiment, the system user enters a data channel identifier, a date, a start time, and an end time into the system using keyboard 133A. The data channel identifier may identify a television channel or 5 in fact any communication channel that carries recordable data. In other embodiments, this scheduling step references an electronic program guide or other database of channel program schedules.

Step 320 allows the system user to set a reminder for the scheduled recording event. Specifically, the system prompts the user to decide not only 10 whether the system will output a reminder signal for the scheduled recording event, but also when the reminder will occur. In the preferred embodiment, the system default is to provide a reminder signal one hour before the recording event. The user can override the reminder signal altogether or establish another time interval. For example, the user may prefer to have 24-hours notice of the 15 recording event to buy new recording media, for example, a blank video cassette.

In step 330, the system prompts the user to schedule additional recording sessions. The sequence of steps 310-330 allows the user to define a unique remind interval for each recording session. Thus, for example, the user could define a 24-hour remind interval for one recording session and 2-hour remind 20 session for another recording session. If the user has no more recording session to schedule, the system proceeds to step 340.

In step 340, the system determines remind times based on the recording instructions (scheduled recordings) and their respective remind intervals. In the preferred embodiment, this entails subtracting each remind interval from the start 25 time of its respective recording session.

In step 350, the system stores these remind times in reminder database 133A. In the preferred embodiment, this storing entails adding the remind times to the database and then sorting the database chronologically to list the earliest remind times first.

30 In step 360, the system outputs a reminder signal at a predetermined time before the time of the data recording. In the preferred embodiment, this entails searching the reminder database for the earliest reminder time and comparing this to the current system time provided by clock 135. Because of sorting in the

preferred embodiment, the first listed remind time will always be the earliest; so searching reduces to selecting the first listed remind time.

If the earliest reminder time matches the current system time, the system outputs the reminder signal. In one embodiment, the reminder signal a verbal

5 and a textual message, both indicating not only that a recording session has been scheduled, but also its start and end time. In another embodiment, which recognizes the mobility and active lives of system users, the system pages or telephones a user with a reminder signal. The preferred embodiment outputs both a loud high-pitched tone that last for 30 seconds while displaying the

10 following flashing message on a portion of monitor 110:

RECORDING EVENT

10 PM WEDNESDAY, SEPTEMBER 24, 1999.

CHECK RECORDING MEDIA

In step 370, the system prompts the user to acknowledge receipt of the

15 reminder signal recording and to allow the data recording session to proceed as scheduled or to cancel the data recording session. In step 380, assuming the user has not canceled the recording session, the system commands data-storage device 133 to start the recording session at the scheduled time.

In step 390, the system deletes the remind time for the recording session

20 from reminder database 133A and returns to step 360 to determine the next remind time.

Conclusion

The present invention, a system and method of reminding users of upcoming recording events, solves the problem of users forgetting about

25 previously-logged recording instructions, particular for video recording systems. More particularly, the system and method reminds users to load their VCRs or other recording devices with suitable recording media, thereby not only safeguarding highly-prized recordings of family events, such as births, marriages, and graduations, from inadvertent over-recording, but also ensuring

30 that the recording devices have sufficient recording media to record an entire programming event.

The embodiments described above are intended only to illustrate and teach one or more ways of practicing or implementing the present invention, not


to restrict its breadth or scope. The scope of the invention, intended to encompass all ways of practicing or implementing the invention, is defined only by the following claims and their equivalents.


Claims

1. A method of operating a computerized system having a recording device for recording data, the method comprising:
 - 5 scheduling a data recording for a time; and
 - outputting a reminder signal at a predetermined time before the time of the data recording.
- 10 2. The method of claim 1, further comprising:
 - starting the data recording at the time.
- 15 3. The method of claim 1, further comprising:
 - receiving input to cancel the data recording after outputting the reminder signal.
- 20 4. The method of claim 1, further including:
 - receiving user input at least partially determinative of the predetermined time.
5. The method of claim 1, wherein outputting the reminder signal includes
25 20 outputting a user-perceptible signal.
6. The method of claim 1 wherein outputting the reminder signal includes
outputting a verbal message, a textual message, or an audible tone.
- 25 7. The method of claim 1, wherein outputting a reminder signal includes
outputting a message concerning recording media.
8. The method of claim 1, wherein scheduling the data recording includes
communicating a recording instruction to the computerized system, and wherein
30 30 outputting the reminder signal includes storing reminder data based on the recording instruction in a database.

9. The method of claim 8 wherein the recording instruction includes a channel identifier, a start time, and an end time.
10. The method of claim 1, wherein outputting a reminder signal at the predetermined time before the time of the data recording includes:
 - 5 determining a remind time based on the predetermined time and the time of the data recording; and
 - comparing a system time to the remind time.
- 10 11. A computerized entertainment system comprising:
 - a receiver for receiving a channel signal which carries a plurality of programs;
 - a recording device, coupled to the receiver, for recording one of the programs; and
- 15 12. The computerized entertainment system of claim 11, wherein the output device includes a reminder database for storing a remind time that determines when the reminder signal is output.
13. The system of claim 11 wherein the output device comprises a computer and a display.
- 25 14. The system of claim 11 wherein the reminder signal is a user-perceptible signal.
15. The system of claim 11 wherein the reminder signal includes a verbal message, a visible message, or an audible tone.
- 30 16. The system of claim 11 wherein the reminder signal includes a message concerning recording media.

17. A computer comprising reminder-generation software, the reminder-generation software comprising instructions for:
 - scheduling a read-write data storage device to record data at a future time;
 - and
- 5 outputting a reminder signal at a predetermined time before the future time.
18. The computer of claim 17, wherein the reminder-generation software further comprises instructions for:
 - receiving input from the user-interface device to prevent data recording at
- 10 the future time, after outputting the reminder signal.
19. The computer of claim 18, wherein the reminder-generation software further comprises instructions for:
 - receiving user input through the user-interface device, which is at least
- 15 partially determinative of the predetermined time.
20. The computer of claim 18, wherein the reminder-generation software instructions for outputting a reminder signal include instructions for including a message concerning recording media as part of the reminder signal.
- 20
21. A computer-readable medium comprising instructions for:
 - scheduling a read-write data storage device to record data at a future time;
 - and
- 25 outputting a reminder signal at a predetermined time before the future time.
22. The computer-readable medium of claim 21, further comprising instructions for:
 - receiving input through a user-interface device to prevent data recording at
- 25 the future time, after outputting the reminder signal.
- 30
23. The computer-readable medium of claim 21, wherein the instructions for outputting a reminder signal includes instructions for including a message concerning recording media as part of the reminder signal.

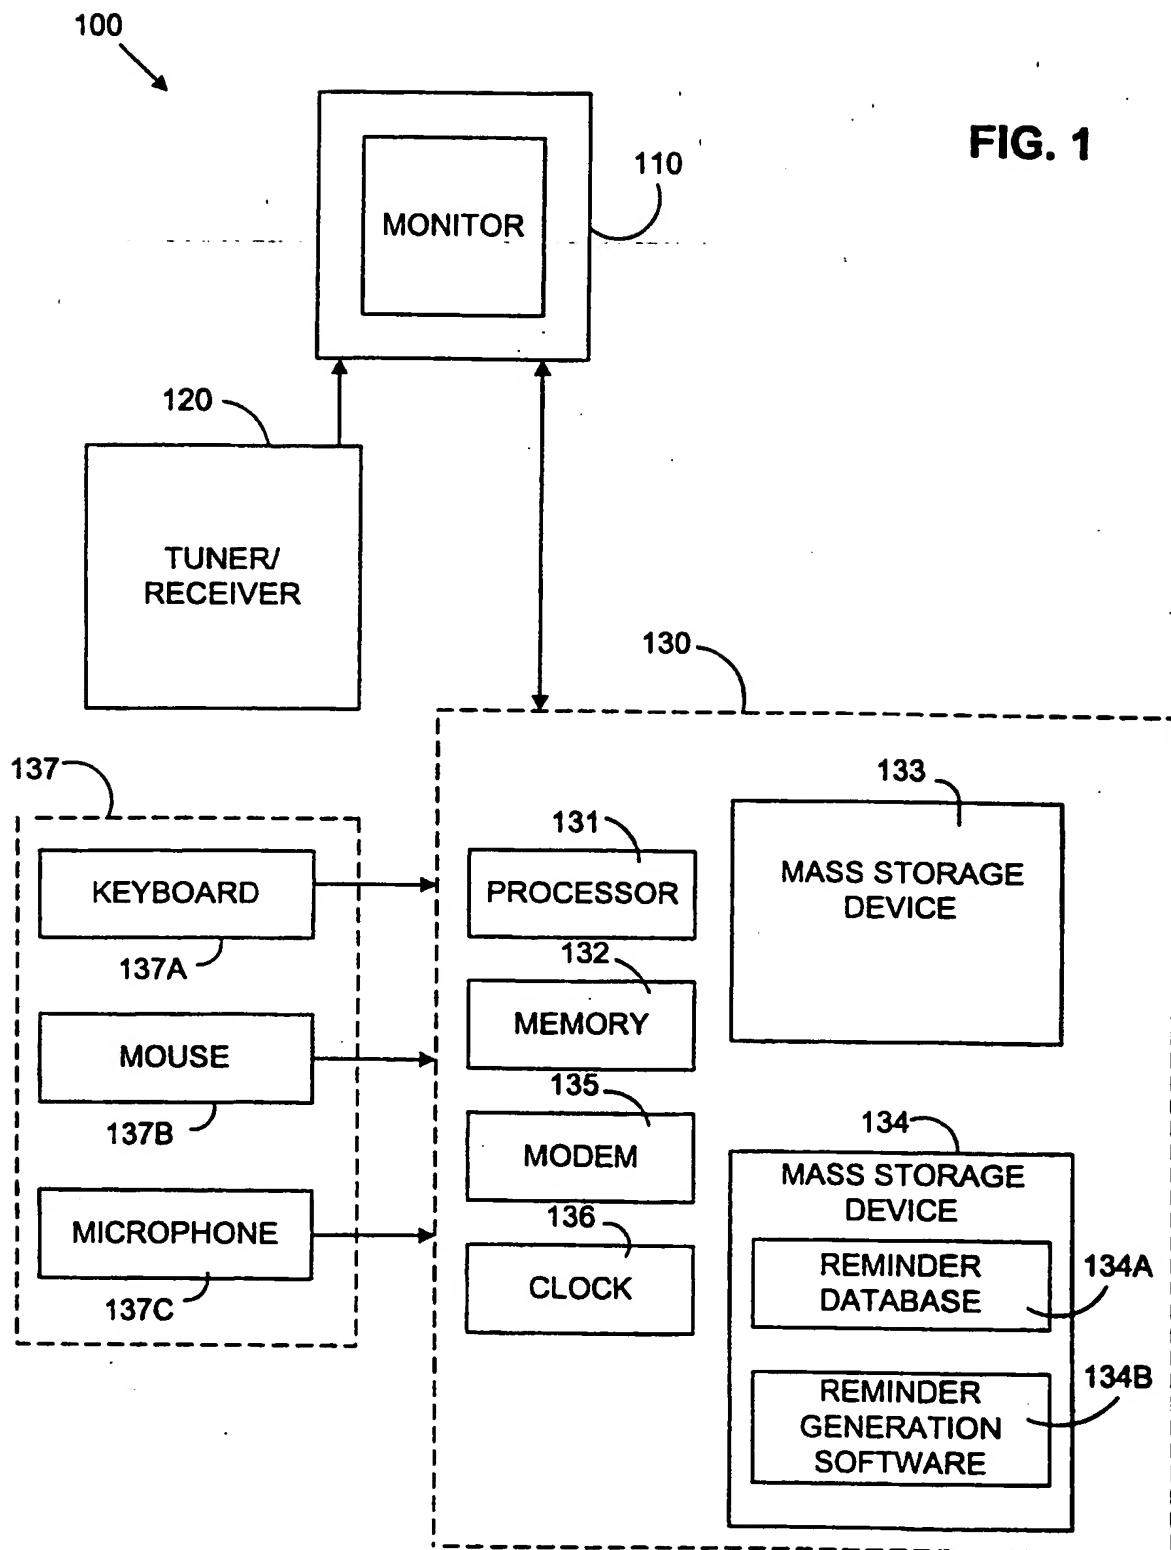

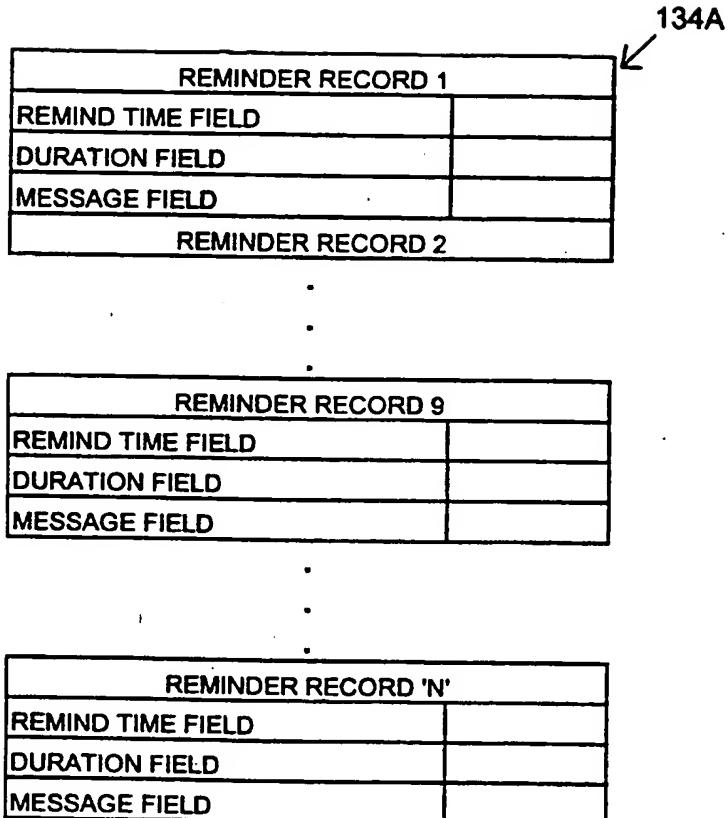

134A

REMINDER RECORD 1	
REMIND TIME FIELD	
DURATION FIELD	
MESSAGE FIELD	
REMINDER RECORD 2	

REMINDER RECORD 9	
REMIND TIME FIELD	
DURATION FIELD	
MESSAGE FIELD	

REMINDER RECORD 'N'	
REMIND TIME FIELD	
DURATION FIELD	
MESSAGE FIELD	

FIG. 2

